


# Fibre Patch Leads

Connectix Fibre Patch Leads are manufactured in-house, are 100% tested and certified and surpass the high standards required for datacomms and CATV applications. They are available in multimode OM1 62.5/125, OM2 50/125, OM3 50/125, OM4 50/125 and singlemode OS1 9/125 ruggedised cable.

The leads are manufactured in our advanced fibre termination facility under stringently controlled quality conditions. Our termination facility is one of the largest in the UK providing a high volume and fast turnaround service for all types of multimode and singlemode terminations.

Ordering Information	
Product Description	Part Number
Multimode OM1 62.5/125 Patch Lead (1 metre)	
LC to LC Duplex	005-324-010-01B
LC to SC Duplex	005-322-010-01B
LC to ST Duplex	005-323-010-01B
SC to SC Duplex	005-307-010-01B
SC to ST Duplex	005-308-010-01B
ST to ST Duplex	005-302-010-01B
Multimode OM2 50/125 Patch Lead (1 metre)	
LC to LC Duplex	005-624-010-01B
LC to SC Duplex	005-622-010-01B
LC to ST Duplex	005-623-010-01B
SC to SC Duplex	005-607-010-01B
SC to ST Duplex	005-608-010-01B
ST to ST Duplex	005-602-010-01B
Multimode OM3 50/125 Patch Lead (1 metre)	
LC to LC Duplex	005-634-010-01B
LC to SC Duplex	005-629-010-01B
LC to ST Duplex	005-635-010-01B
SC to SC Duplex	005-633-010-01B
SC to ST Duplex	005-648-010-01B
ST to ST Duplex	005-647-010-01B
Multimode OM4 50/125 Patch Lead (1 metre)	
LC to LC Duplex	005-662-010-01B
LC to SC Duplex	005-668-010-01B
SC to SC Duplex	005-669-010-01B
Singlemode OS2 9/125 Patch Lead (1 metre)	
ST to ST Duplex	005-902-010-01B
SC to ST Duplex	005-908-010-01B
SC to SC Duplex	005-907-010-01B
LC to LC Duplex	005-922-010-01B
LC to ST Duplex	005-923-010-01B
LC to LC Duplex	005-924-010-01B

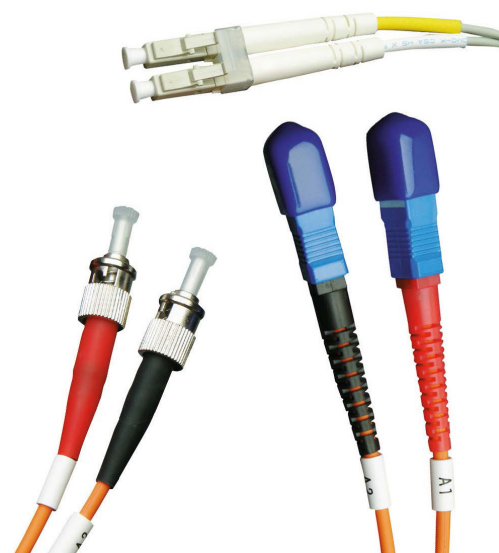

## Features & Benefits

- LC, SC, ST & FC connector leads available
- 100% tested and certified
- High quality singlemode & multimode cables
- OM1, OM2, OM3, OM4 & OS2 cable
- Terminated under quality-controlled conditions
- 1m to 5m lengths available from stock

### Multimode Connector Specifications

Connector Specification	Compliant with IEC 874-14
Ferrule Material	Full Zirconia
Insertion Loss	Max. 0.3dB typical 0.2dB
Return Loss	>-40dB
Operating Temperature	-40°C to +85°C

### Singlemode Connector Specifications

Connector Specification	Compliant with IEC 874-14
Ferrule Material	Full Zirconia
Insertion Loss	Max. 0.3dB typical 0.2dB
Return Loss	UPC >-50dB, APC >-60dB
Operating Temperature	-40°C to +85°C

For core specification please refer to Fibre Specification data sheet.